



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司


FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

1N957...1N978

SILICON PLANAR ZENER DIODES

Standard Zener voltage tolerance is $\pm 20\%$. Add suffix "A" for $\pm 10\%$ tolerance and suffix "B" for $\pm 5\%$ tolerance. Other tolerances, non standard and higher Zener voltages are upon request.

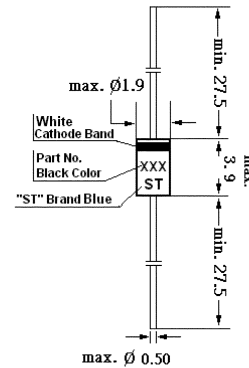

Glass case JEDEC DO-35

Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation	P_{tot}	400 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_s	-65 to +175	$^\circ\text{C}$

¹⁾ Valid provided that leads at a distance of 8mm from case are kept at ambient temperature.

Characteristics at $T_{\text{amb}} = 25^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	-	-	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 200\text{mA}$	V_F	-	-	1.5	V

¹⁾ Valid provided that leads at a distance of 8mm from case are kept at ambient temperature.



SEMTECH

Dated : 22/07/2005



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206


1N957...1N978

Characteristics at $T_j = 25^\circ\text{C}$

TYPE	Zener Voltage Range ¹⁾		Dynamic resistance			Typical Temperature Coefficient	Maximum Reverse Leakage Current			Maximum Regulator Current	
	V _{znom} V	I _{zT} mA	r _{zT} Ω	r _{zjk} at I _{zK}			I _R ²⁾ μA	Test-Voltage			I _{zM} mA
				Ω	mA			Suffix A V	Suffix B V		
1N957	6.8	18.5	4.5	700	1	0.05	150	4.9	5.2	47	
1N958	7.5	16.5	5.5	700	0.5	0.058	75	5.4	5.7	42	
1N959	8.2	15	6.5	700	0.5	0.062	50	5.9	6.2	38	
1N960	9.1	14	7.5	700	0.5	0.068	25	6.6	6.9	35	
1N961	10	12.5	8.5	700	0.25	0.075	10	7.2	7.6	32	
1N962	11	11.5	9.5	700	0.25	0.076	5	8	8.4	28	
1N963	12	10.5	11.5	700	0.25	0.077	5	8.6	9.1	26	
1N964	13	9.5	13	700	0.25	0.079	5	9.4	9.9	24	
1N965	15	8.5	16	700	0.25	0.082	5	10.8	11.4	21	
1N966	16	7.8	17	700	0.25	0.083	5	11.5	12.2	19	
1N967	18	7	21	750	0.25	0.085	5	13	13.7	17	
1N968	20	6.2	25	750	0.25	0.086	5	14.4	15.2	15	
1N969	22	5.6	29	750	0.25	0.087	5	15.8	16.7	14	
1N970	24	5.2	33	750	0.25	0.088	5	17.3	18.2	13	
1N971	27	4.6	41	750	0.25	0.09	5	19.4	20.6	11	
1N972	30	4.2	49	1000	0.25	0.091	5	21.6	22.8	10	
1N973	33	3.8	58	1000	0.25	0.092	5	23.8	25.1	9	
1N974	36	3.4	70	1000	0.25	0.093	5	25.9	27.4	8.5	
1N975	39	3.2	80	1000	0.25	0.094	5	28.1	29.7	7.8	
1N976	43	3	93	1500	0.25	0.095	5	31	32.7	7	
1N977	47	2.7	105	1500	0.25	0.095	5	33.8	35.8	6.4	
1N978	51	2.5	125	1500	0.25	0.095	5	36.7	38.8	5.9	

1) Tested with pulses tp = 20ms

2) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.



SEMTECH

Dated : 22/07/2005





FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

1N957...1N978

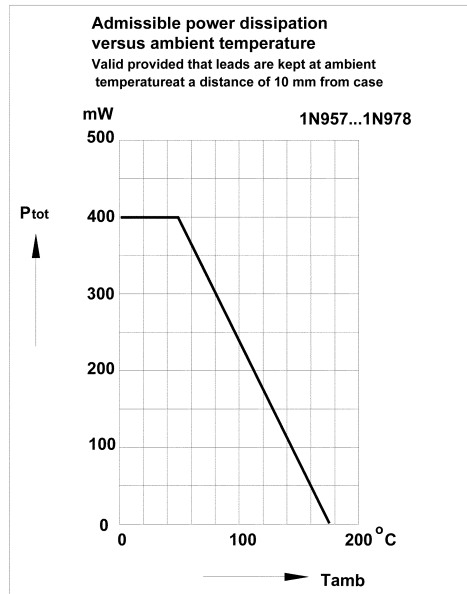

SEMTECH

Dated : 22/07/2005