



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

## GL34A THRU GL34M


### SURFACE MOUNT GLASS PASSIVATED RECTIFIERS

Reverse Voltage - 50 to 1000 V

Forward Current - 0.5 A

#### Features

- Low power loss, high efficient
- High surge current capability
- Low forward voltage drop
- For use in low voltage, high frequency inverters, free wheeling application
- Guarding for over voltage protection

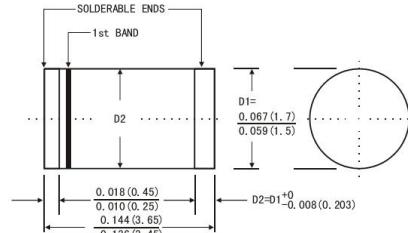

MiniMELF (DO-213AA) Plastic Package

#### Mechanical Data

- Case: MiniMELF(DO-213AA), molded plastic body
- Terminals: Plated terminal
- Polarity: Color band denotes cathode end
- Mounting Position: Any


#### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	GL34A	GL34B	GL34D	GL34G	GL34J	GL34K	GL34M	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A = 75^\circ\text{C}$	$I_{F(AV)}$				0.5				A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$				25				A
Maximum Forward Voltage at 0.5 A	$V_F$				1.1				V
Maximum Reverse Current at Rated DC Blocking Voltage	$I_R$				5 250				μA
Typical Junction Capacitance <sup>1)</sup>	$C_J$				4				pF
Typical Thermal Resistance <sup>2)</sup>	$R_{θJA}$				125				°C/W
Operating and Storage Temperature Range	$T_j, T_{stg}$				- 65 to + 150				°C

<sup>1)</sup> Measured at 1 MHz and applied reverse voltage of 4 V D.C.

<sup>2)</sup> Thermal resistance from junction to ambient.



Dated : 04/05/2009 N



FUKUCOM COMPANY LTD.


福 靈 有 限 公 司

FLAT P, 3/F, EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

## GL34A THRU GL34M


DERATING CURVE FOR OUTPUT  
RECTIFIER CURRENT

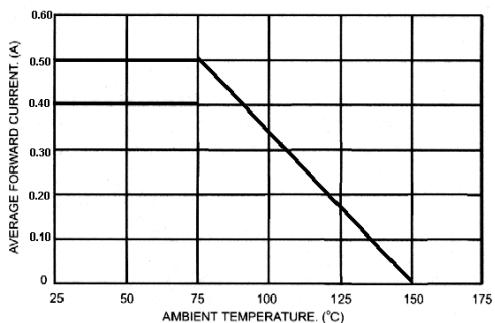



MAXIMUM NON - REPETITIVE PEAK  
FORWARD SURGE CURRENT

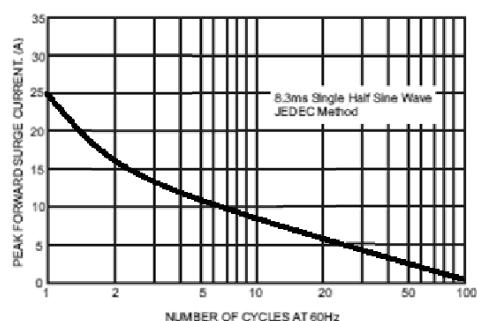

TYPICAL INSTANTANEOUS FORWARD  
CHARACTERISTICS

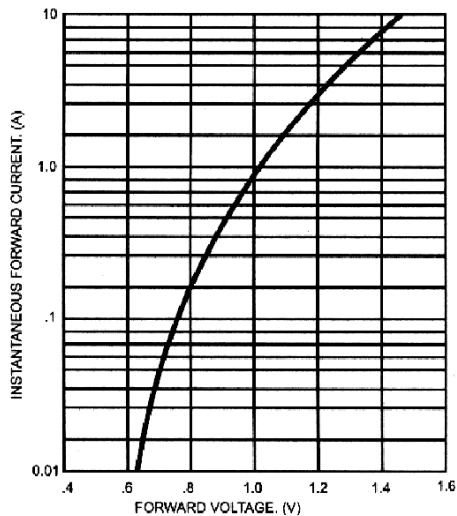

TYPICAL JUNCTION CAPACITANCE

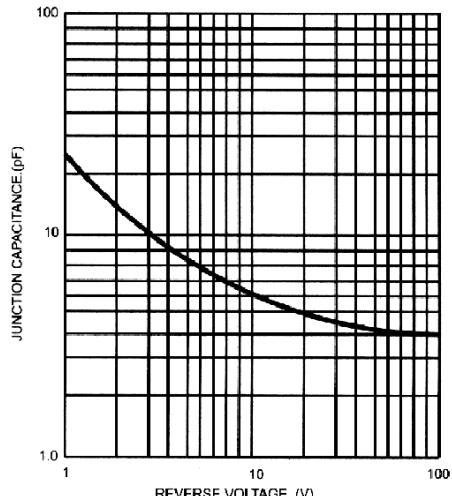

Dated : 04/05/2009 N